

CZ-MZ and CZA-MZA enclosures size "49.16" for aggressive environments W-TYPE

inserts:	page:
CD 15 poles + ⊕	55
CSAH 10 poles + ⊕	87
CDA 10 poles + ⊕	98
CDC 10 poles + ⊕	99
MIXO 1 module	179 - 214

insert centre distance:
49 x 16 mm

The covers for L and LG versions cannot be used together with coding pins.
If this application is required, please contact ILME SpA.

housings and cover




hoods and cover




description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever	CZIW 15 L	—						
surface mounting housing, with lever	CZPW 15 L2	16 x 2	MZPW 15 L225	25 x 2				
cover with pegs (for 1 lever enclosures) 1)	CZCW 15 L							
enclosure with pegs, side entry					CZOW 15 L	16	MZOW 15 L20	20
enclosure with pegs, side entry					CZAOW 15 L21	21	MZOW 15 L25	25
enclosure with pegs, side entry, high construction					CZVW 15 L	13,5	MZAOW 15 L25	25
enclosure with pegs, top entry					CZAVW 15 L21	21	MZVW 15 L20	20
enclosure with pegs, top entry, high construction							MZAVW 15 L25	25
cover with lever (for enclosures with pegs) 2)					CZCW 15 LG			

panel cut-out for bulkhead mounting housing in mm

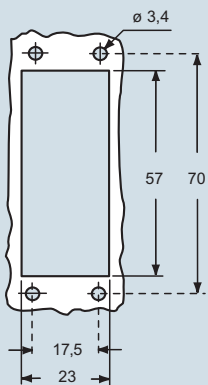


dimensions in mm


CZIW L

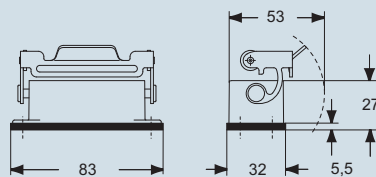

CZPW L and MZPW L

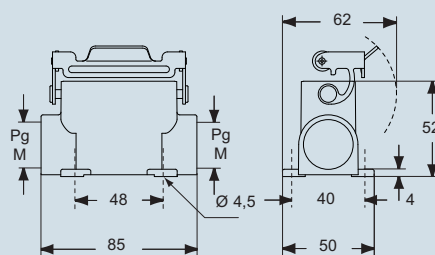


CZCW L




dimensions in mm


CZOW L and MZOW L

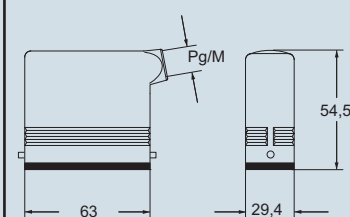



CZAOW L - MZAOW L and CZAVW L - MZAVW L

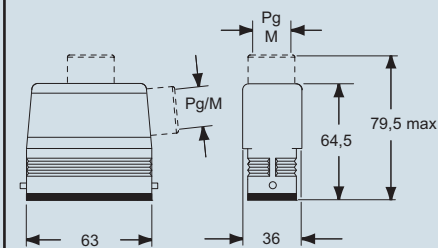

CZVW L and MZVW L



CZCW LG

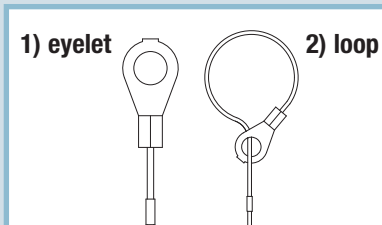

ILME® Type 4/4X/12



IP69K (compliant with DIN 40050-9)

dimensions shown are not binding and may be changed without notice

W-TYPE - size 49.16