


Product **Male panel mount connector SMT, with housing, shieldable**

Area **M12-D, M12-X Series 825/876 D-coding**
 Article number **99 3731 401 04**

Illustration



Scale drawing

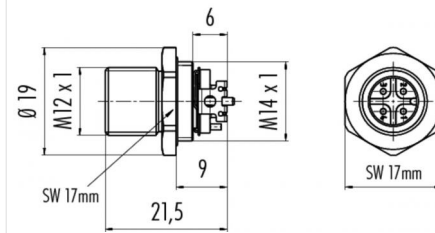

Technical data

General features

Termination	SMT
Upper temperature	-40 °C
Lower temperature	85 °C

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	2
Material group	III
Rated current (40°C)	4A
EMV compliance	shieldable
Degree of protection	IP67
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuZn(Messing)
Contact plating	Au (gold)
Material of contact body	LCP