


Product **contacts 4: male cable connector, IDT connection, wire gauge 0,08-0,25mm²**
 Area **M8 Series 768**
 Article number **99 3383 500 04**


Illustration



Scale drawing

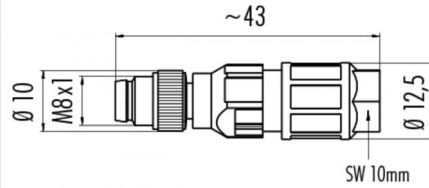

Contact Arrangement



	X	Y
1	-1,70	-0,50
2	-1,08	1,45
3	1,70	-0,50
4	1,08	1,45

Technical data

General features

Connector Design	Cable Connector
Connector locking system	bolted
Termination	cutting clamping
Wire gauge (mm)	0,08 - 0,25mm ²
Wire gauge (AWG)	28 - 24
Cable outlet	2,5 - 5,2mm
Upper temperature	85 °C
Lower temperature	-25 °C

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	III
Rated current (40°C)	4 A
Volume resistivity	≤ 5 mΩ
EMV compliance	not shielded
Degree of protection	IP67

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	TPU