


Product **Contacts: 3+PE, Female cable connector, power, 5-coding, cable outlet 8 -10 mm**  
 Area **M12-S Series 814**  
 Article number **99 0690 19 04**


### Illustration



### Scale drawing

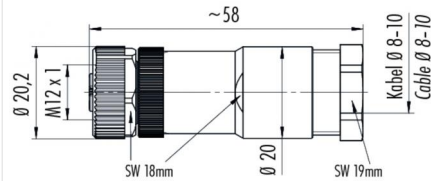


### Contact Arrangement



	X	Y
1	2,55	0,00
2	0,00	-2,55
3	-2,55	0,00
PE	0,00	2,55

### Attenuation characteristics

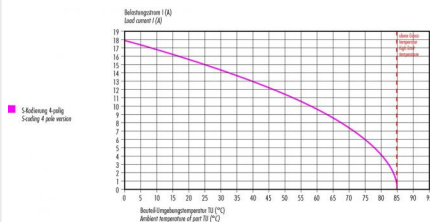

You can find the assembly instruction on the next page.

## Technical data

### General features

Connector Design	Cable socket
Connector locking system	bolted
Termination	removable screw
Wire gauge (mm)	max. 1,5 mm <sup>2</sup>
Wire gauge (AWG)	16
Cable outlet	8 - 10 mm
Upper temperature	85 °C
Lower temperature	-40 °C

### Cable data

Approval 1	UL
------------	----

### Electrical parameters

Rated voltage	630 V
Rated impulse voltage	6000 V
Pollution degree	3
Overvoltage category	III
Material group	III
Rated current (40°C)	12 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP67
Mechanical operation	> 50 Mating cycles

### Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PA

Product	Contacts: 3+PE, Female cable connector, power, 5-coding, cable outlet 8 -10 mm
Area	M12-S Series 814
Article number	99 0690 19 04

Installation instructions / Mounting cutout

