


Product **contacts 3+PE: male cable connector, cable outlet 7-17mm, screw clamp**

Area **RD24 Power Series 692/693**
 Article number **99 4221 300 04**

Illustration



Scale drawing

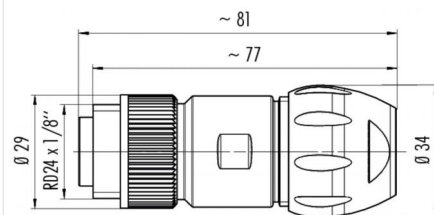

Technical data

General features

Connector Design	Cable Connector
Connector locking system	bolted
Termination	removable screw
Wire gauge (mm)	0,5-2,5 mm ²
Wire gauge (AWG)	20-14
Cable outlet	7 - 17mm
Upper temperature	100 °C
Lower temperature	-40 °C

Electrical parameters

Rated voltage	400 V
Rated impulse voltage	6000 V
Pollution degree	3
Overvoltage category	III
Material group	III
Rated current (40°C)	16 A
Volume resistivity	≤ 5 mΩ
EMV compliance	not shielded
Degree of protection	IP67
Mechanical operation	> 50 Mating cycles

Material

Material of contact	CuSn (Bronze)
Contact plating	Ag (silver)
Material of contact body	PBT