

inserts:	page:
CD ..... 25 poles + ⊕	56
CDD ..... 38 poles + ⊕	68
CSAH ..... 16 poles + ⊕	88
CDA ..... 16 poles + ⊕	100
CDC ..... 16 poles + ⊕	101


insert centre distance:  
66 x 16 mm

The covers for L and LG versions cannot be used together with coding pins.  
If this application is required, please contact ILME SpA.

**housings and cover**





**hoods and cover**



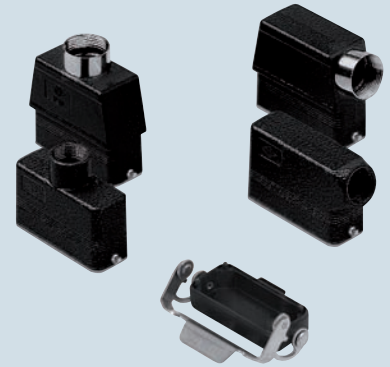


description	part No.		part No.		part No.		part No.	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M
bulkhead mounting housing with lever								
surface mounting housing, with lever								
cover with pegs (for 1 lever enclosures) 1)								
enclosure with pegs, side entry								
enclosure with pegs, side entry								
enclosure with pegs, side entry, high construction								
enclosure with pegs, top entry								
enclosure with pegs, top entry, high construction								
cover with lever (for enclosures with pegs) 2)								




panel cut-out for bulkhead mounting housing in mm

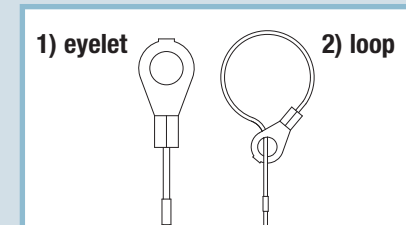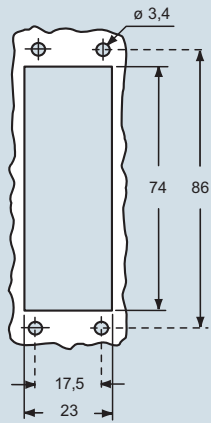


dimensions in mm

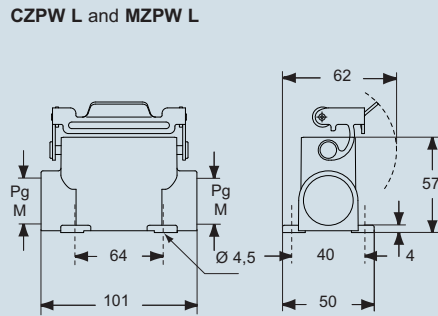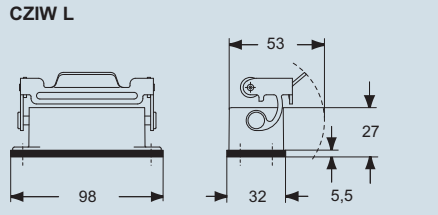


dimensions in mm

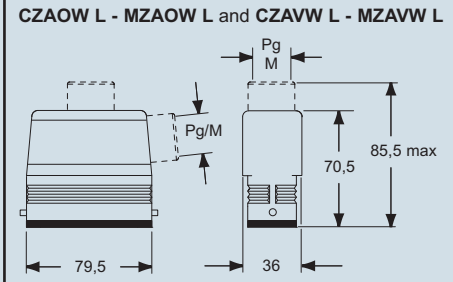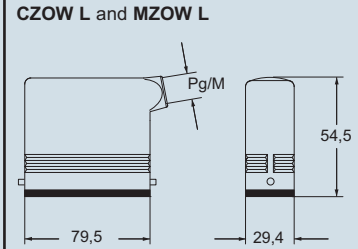

\* can only be used with a complete cable gland (to be purchased separately)



**ILME** Type 4/4X/12



dimensions shown are not binding and may be changed without notice

W-TYPE - size 66.16