



inserts:		page:
<b>CDD</b> .....	42 poles + ⊕	69
<b>CDS</b> .....	18 poles + ⊕	79
<b>CSH</b> .....	10 poles + ⊕	92
<b>CNE, CSE</b> .....	10 poles + ⊕	105
<b>CCE</b> .....	10 poles + ⊕	111
<b>CSS</b> .....	10 poles + ⊕	123
<b>CT, CTSE (16A) *</b> ..	10 poles + ⊕	131
<b>CQE</b> .....	18 poles + ⊕	139
<b>CMCE</b> .....	3+2 (aux) poles + ⊕	148
<b>CMSH</b> .....	3+2 (aux) poles + ⊕	149
<b>CX</b> .....	8/24 poles + ⊕	169
<b>MIXO</b> .....	3 modules	179 - 215

\*) can be used only in bulkhead mounting housings

insert centre distance:  
**57 x 27 mm**

**bulkhead mounting housings for central lever**




**surface mounting housings, high construction with two entries for central lever**




description	part No.	part No.	entry Pg	part No.	entry M
bulkhead mounting with pegs for central lever	<b>CHI 10 YC</b>				
surface mounting, high construction, with pegs, for central lever		<b>CAP 10 YC229</b>	29x2	<b>MAP 10 YC232</b>	32x2

panel cut-out for bulkhead mounting housings in mm

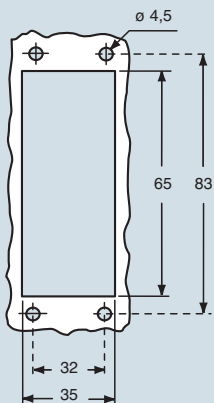


dimensions in mm

**CHI YC**



dimensions in mm

**CAP YC and MAP YC**

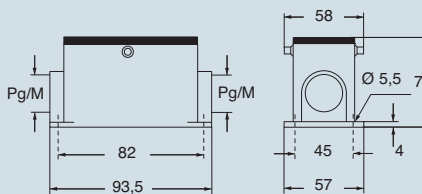

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages. Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

**CRUS**® Type 4/4X/12



dimensions shown are not binding and may be changed without notice

CENTRAL LEVER - size 57.27



inserts:	page:
<b>CDD</b> ..... 42 poles + ⊕	69
<b>CDS</b> ..... 18 poles + ⊕	79
<b>CSH</b> ..... 10 poles + ⊕	92
<b>CNE, CSE</b> ..... 10 poles + ⊕	105
<b>CCE</b> ..... 10 poles + ⊕	111
<b>CSS</b> ..... 10 poles + ⊕	123
<b>CQE</b> ..... 18 poles + ⊕	139
<b>CMCE</b> ..... 3+2 (aux) poles + ⊕	148
<b>CMSH</b> ..... 3+2 (aux) poles + ⊕	149
<b>CX</b> ..... 8/24 poles + ⊕	169
<b>MIXO</b> ..... 3 modules	179 - 215

insert centre distance:  
57 x 27 mm

hoods with central lever



hoods with central lever




description	part No.		entry Pg		part No.		entry M	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M		
side entry, high construction	<b>CAO 10 YX21</b>	21	<b>MAO 10 YX32</b>	32				
side entry, high construction	<b>CAO 10 YX29</b>	29	<b>MAO 10 YX40</b>	40				
top entry, high construction					<b>CAV 10 YX21</b>	21	<b>MAV 10 YX32</b>	32
top entry, high construction					<b>CAV 10 YX29</b>	29	<b>MAV 10 YX40</b>	40

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages. Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.


dimensions in mm

CAO..YX and MAO..YX

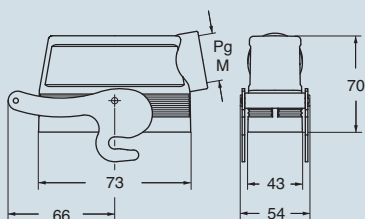

dimensions in mm

CAV..YX and MAV..YX

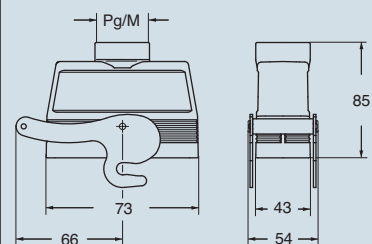

**CRUS**® Type 4/4X/12



dimensions shown are not binding and may be changed without notice

CENTRAL LEVER - size 57.27